



Basic unit SIMOCODE pro V PN, Ethernet/PROFINET IO, PN system redundancy, OPC UA server, Web server, transmission rate 100 Mbps, 2 x bus connection via RJ45, 4I/3O freely parameterizable, Us: 24 V DC, input for thermistor connection
Monostable relay outputs, expandable by extension modules

product brand name	SIRIUS
product designation	Motor management system
design of the product	basic unit 3
product type designation	SIMOCODE pro V PN
General technical data	
product function	
<ul style="list-style-type: none"> • current measurement • voltage measurement • active power measurement • energy measurement • frequency measurement • bus communication • data acquisition function • diagnostics function • password protection • test function • maintenance function 	<ul style="list-style-type: none"> No No Yes No No Yes Yes Yes Yes Yes Yes
product component	
<ul style="list-style-type: none"> • input for thermistor connection • digital input • input for analog temperature sensors • input for ground fault detection • relay output 	<ul style="list-style-type: none"> Yes Yes No No Yes
product extension	
<ul style="list-style-type: none"> • temperature monitoring module • current measuring module • current/voltage measuring module • fail-safe digital I/O module • ground-fault monitoring module • decoupling module • control unit with display • control unit • analog I/O module 	<ul style="list-style-type: none"> Yes Yes Yes Yes Yes Yes Yes Yes Yes
consumed active power	3.6 W
insulation voltage with degree of pollution 3 at AC rated value	300 V
surge voltage resistance rated value	4 000 V
shock resistance	
<ul style="list-style-type: none"> • according to IEC 60068-2-27 	15g / 11 ms
<ul style="list-style-type: none"> • vibration resistance 	1-6 Hz / 15 mm; 6-500 Hz / 2 g

switching capacity current of the NO contacts of the relay outputs at AC-15	
• at 24 V	6 A
• at 120 V	6 A
• at 230 V	3 A
switching capacity current of the NO contacts of the relay outputs at DC-13	
• at 24 V	2 A
• at 60 V	0.55 A
• at 125 V	0.25 A
mechanical service life (operating cycles) typical	10 000 000
electrical endurance (operating cycles) typical	100 000
buffering time in the event of power failure	0.02 s
reference code according to IEC 81346-2	F
continuous current of the NO contacts of the relay outputs	
• at 50 °C	6 A
• at 60 °C	5 A
type of input characteristic	Type 1 in accordance with EN 61131-2
Substance Prohibitation (Date)	03/01/2017
SVHC substance name	Lead - 7439-92-1 Lead monoxide (lead oxide) - 1317-36-8 2-methyl-1-(4-methylthiophenyl)-2-morpholinopropan-1-one - 71868-10-5
Weight	0.326 kg
Electromagnetic compatibility	
EMC emitted interference according to IEC 60947-1	class A
EMC immunity according to IEC 60947-1	corresponds to degree of severity 3
conducted interference	
• due to burst according to IEC 61000-4-4	2 kV (power ports) / 1 kV (signal ports)
• due to conductor-earth surge according to IEC 61000-4-5	2 kV
• due to conductor-conductor surge according to IEC 61000-4-5	1 kV
• due to high-frequency radiation according to IEC 61000-4-6	10 V
field-based interference according to IEC 61000-4-3	10 V/m
electrostatic discharge according to IEC 61000-4-2	6 kV contact discharge / 8 kV air discharge
conducted HF interference emissions according to CISPR11	corresponds to degree of severity A
field-bound HF interference emission according to CISPR11	corresponds to degree of severity A
Inputs/ Outputs	
product function	
• parameterizable inputs	Yes
• parameterizable outputs	Yes
number of inputs	4
• for thermistor connection	1
number of digital inputs with a common reference potential	4
digital input version	
• type 1 acc. to IEC 61131	Yes
input voltage at digital input at DC rated value	24 V
number of outputs	3
number of semiconductor outputs	0
number of outputs as contact-affected switching element	3
switching behavior	monostable
type of relay outputs	Monostable
wire length for digital signals maximum	300 m
wire length for thermistor connection	
• with conductor cross-section = 0.5 mm ² maximum	50 m
• with conductor cross-section = 1.5 mm ² maximum	150 m
• with conductor cross-section = 2.5 mm ² maximum	250 m
Protective and monitoring functions	
product function	
• asymmetry detection	Yes
• blocking current evaluation	Yes
• power factor monitoring	Yes

• ground fault detection	Yes
• ground-fault monitoring	No
• phase failure detection	Yes
• phase sequence recognition	Yes
• voltage detection	Yes
• monitoring of number of start operations	Yes
• overvoltage detection	Yes
• overcurrent detection 1 phase	Yes
• undervoltage detection	Yes
• undercurrent detection 1 phase	Yes
• active power monitoring	Yes
product function	
• current detection	Yes
• overload protection	Yes
• evaluation of thermistor motor protection	Yes
total cold resistance number of sensors in series maximum	1.5 k Ω
response value of thermoresistor	3 400 ... 3 800 Ω
• of the short-circuit control	9 Ω
release value of thermoresistor	1 500 ... 1 650 Ω
Motor control functions	
product function	
• parameterizable overload relay	Yes
• circuit breaker control	Yes
• direct start	Yes
• reverse starting	Yes
• star-delta circuit	Yes
• star-delta reversing circuit	Yes
• Dahlander circuit	Yes
• Dahlander reversing circuit	Yes
• pole-changing switch circuit	Yes
• pole-changing switch reversing circuit	Yes
• slide control	Yes
• valve control	Yes
Communication/ Protocol	
protocol is supported	
• PROFIBUS DP protocol	No
• PROFINET IO protocol	Yes
• PROFI-safe protocol	Yes
• Modbus RTU	No
• EtherNet/IP	No
• OPC UA Server	Yes
• LLDP	Yes
• Address Resolution Protocol (ARP)	Yes
• SNMP	Yes
• HTTPS	Yes
• NTP	Yes
• Media Redundancy Protocol (MRP)	Yes
number of interfaces	
• according to PROFINET	2
• according to PROFIBUS	0
• according to Ethernet/IP	0
product function	
• web server	Yes
• shared device	Yes
• at the Ethernet interface Autocrossover	Yes
• at the Ethernet interface Autonegotiation	Yes
• at the Ethernet interface Autosensing	Yes
• Media Redundancy Protocol for Planned Duplication (MRPD)	Yes
• is supported Device Level Ring (DLR)	No
• is supported PROFINET system redundancy (S2)	Yes

<ul style="list-style-type: none"> • supports PROFinergy measured values • supports PROFinergy shutdown 	Yes
transfer rate	100 Mbit/s
transfer rate maximum	100 Mbit/s
PROFINET conformity class	C
identification & maintenance function	
<ul style="list-style-type: none"> • I&M0 - device-specific information • I&M1 - higher level designation/location designation • I&M2 - installation date • I&M3 - comment 	Yes
type of electrical connection of the communication interface	2x RJ45

Installation/ mounting/ dimensions

mounting position	any
fastening method	screw and snap-on mounting
height	111 mm
width	45 mm
depth	124 mm
required spacing	
<ul style="list-style-type: none"> • top • bottom • left • right 	40 mm 40 mm 0 mm 0 mm

Connections/ Terminals

product component removable terminal for auxiliary and control circuit	Yes
type of electrical connection	
<ul style="list-style-type: none"> • for auxiliary and control circuit 	screw-type terminals
type of connectable conductor cross-sections	
<ul style="list-style-type: none"> • solid • finely stranded with core end processing • for AWG cables solid • for AWG cables stranded 	1x (0.5 ... 4.0 mm ²), 2x (0.5 ... 2.5 mm ²) 1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.5 mm ²) 1x (20 ... 12), 2x (20 ... 14) 1x (20 ... 14), 2x (20 ... 16)
tightening torque with screw-type terminals	0.8 ... 1.2 N·m
tightening torque [lbf·in] with screw-type terminals	7 ... 10.3 lbf·in

Ambient conditions

installation altitude at height above sea level	
<ul style="list-style-type: none"> • 1 maximum • 2 maximum • 3 maximum 	2 000 m 3 000 m; max. +50 °C (no protective separation) 4 000 m; max. +40 °C (no protective separation)
ambient temperature	
<ul style="list-style-type: none"> • during operation • during storage • during transport 	-25 ... +60 °C -40 ... +80 °C -40 ... +80 °C
environmental category	
<ul style="list-style-type: none"> • during operation according to IEC 60721 • during storage according to IEC 60721 • during transport according to IEC 60721 	3K6 (no formation of ice, no condensation, relative humidity 10 ... 95%), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6 1K6 (no condensation, relative humidity 10 ... 95%), 1C2 (no salt mist), 1S2 (sand must not get into the devices), 1M4 2K2, 2C1, 2S1, 2M2
relative humidity	
<ul style="list-style-type: none"> • during operation 	5 ... 95 %
contact rating of auxiliary contacts according to UL	B300 / R300

Short-circuit protection

design of short-circuit protection per output	Fuse links: gG 6 A, quick-response 10 A (IEC 60947-5-1), miniature circuit-breaker C char.: 1.6 A (IEC 60947-5-1) or 6 A (I _K < 500 A)
---	---

Electrical Safety

touch protection against electrical shock	finger-safe
--	-------------

ATEX

certificate of suitability	
<ul style="list-style-type: none"> • IECEx • according to ATEX directive 2014/34/EU • according to UKCA 	Yes; IECEx BVS 20.0020 / IECEx PTB 18.0004X BVS 06 ATEX F001, PTB 18 ATEX 5003 X ITS21UKEX0464, ITS21UKEX0455X

explosion device group and category according to ATEX directive 2014/34/EU	II (2) G, II (2) D, I (M2) / I (M2), II (1/2) G, II (1G/2D)
--	---

Galvanic isolation

(electrically) protective separation according to IEC 60947-1	All circuits with protective separation (double creepage paths and clearances), the information in the "Protective Separation" test report, No. A0258, must be observed (link see further information)
--	--

design of the electrical isolation	Protective separation in accordance with IEC 60947-1 for all circuits
• note	Test report No. A0258 must be observed (link see further information)

Control circuit/ Control

product function soft starter control	Yes
type of voltage of the control supply voltage	DC
control supply voltage at DC rated value	24 V
control supply voltage 1 at DC rated value	24 V
operating range factor control supply voltage rated value at DC	
• initial value	0.85
• full-scale value	1.2
inrush current peak	
• at 24 V	17 A
duration of inrush current peak	
• at 24 V	1.1 ms

Approvals Certificates

General Product Approval



[Confirmation](#)



EMV For use in hazardous locations



[KC](#)



For use in hazardous locations Test Certificates Marine / Shipping

[Miscellaneous](#)

[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)



Marine / Shipping other Environment Industrial Communication



[Confirmation](#)



[Environmental Confirmations](#)



Industrial Communication

[PROFINET](#)

Further information

Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<http://mall.industry.siemens.com/mall/en/en/Catalog/product?mifb=3UF7011-1AB00-0>

Cax online generator


<http://support.automation.siemens.com/WWW/CAXorder/default.aspx?lang=en&mifb=3UF7011-1AB00-0>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.industry.siemens.com/cs/ww/en/ps/3UF7011-1AB00-0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mifb=3UF7011-1AB00-0&lang=en

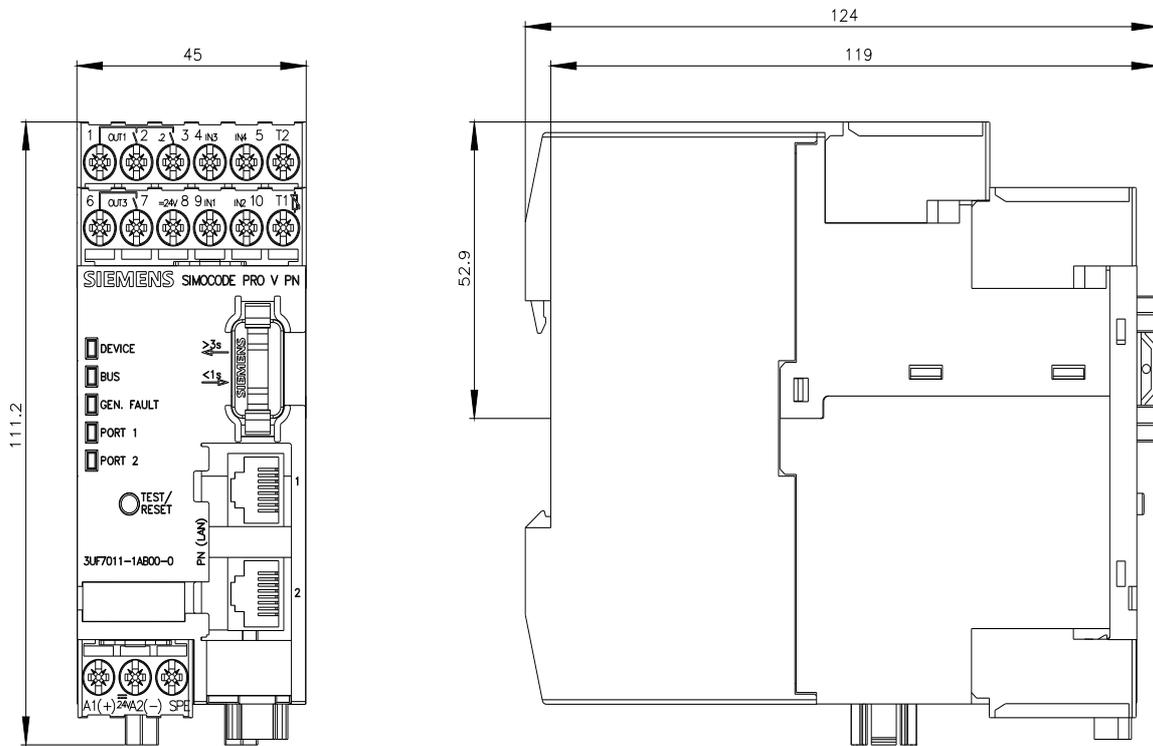

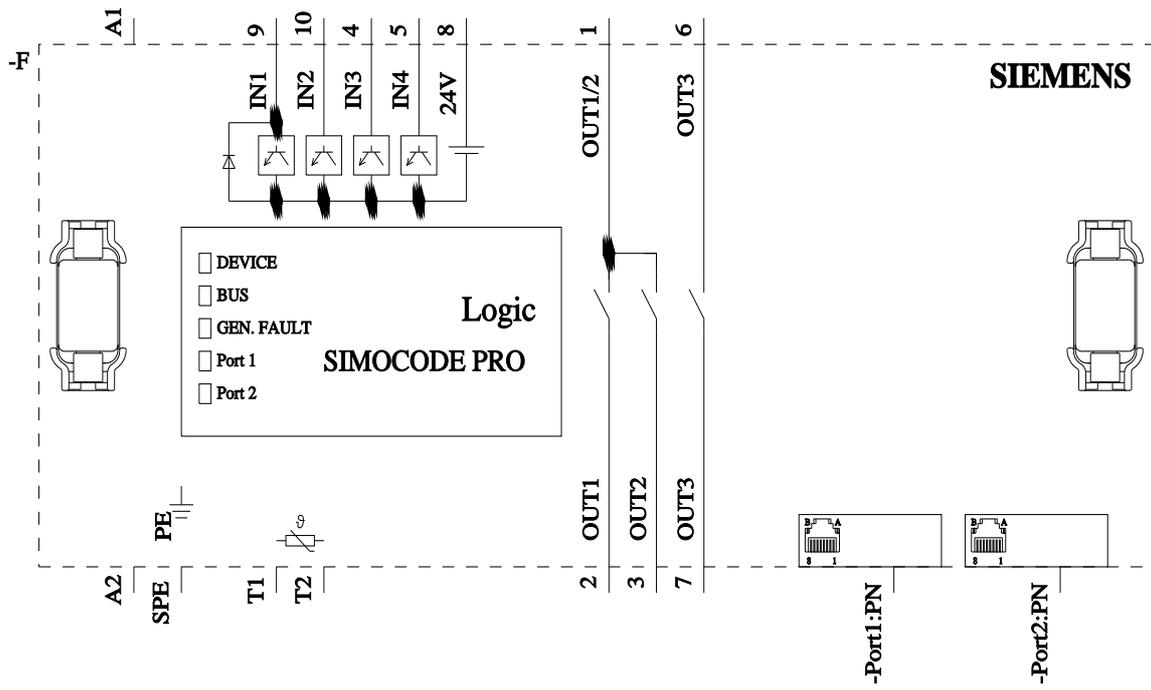

last modified:

3/11/2024